HDSDI TO FIBER CONVERTER Specification

RCA Audio to Fiber Converter




Description:

The RCA Audio to Fiber Converter with RCA Audio connectors which allow transport of CD audio high sampling rate from 48khz to 96khz over standard fiber optic networks. Only one Simplex fiber cable is needed to transmit all required signals in both directions over kilometers.

Features:

- 1) Transmit several audios over one fiber.
- 2) Support 48khz to 96khz.
- 3) LED indicators.
- 4) Supports hot swapping and hot plugging.

Typical Diagram:

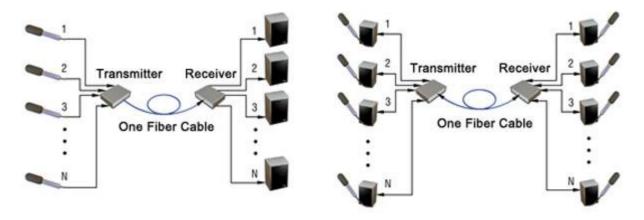

Product:	Item No.	Dimension(mm)	NW(kg)	GW(kg)
2 Channel RCA Audio to Fiber Converter	HK-2A-RCA-T/R	93 x 70 x 25 mm	020. kg/pcs	0.90 kg/pair
4 Channel RCA Audio to Fiber Converter	HK-4A-RCA-T/R	93 x 70 x 25 mm	020. kg/pcs	0.90 kg/pair
2 Channel Bi-di RCA Audio to Fiber Converter	HK-2AA-RCA-T/R	93 x 70 x 25 mm	020. kg/pcs	0.90 kg/pair
Packing in the box	1x Transmitter, 1x Receiver, 2x Power adapter,			